


TCP/IP Interface

Key Features:

- Easily network-enable any product
- Flexible well developed IP protocol
- Ethernet connector on the board
- Reduced installation cost
- Implementation in existing applications

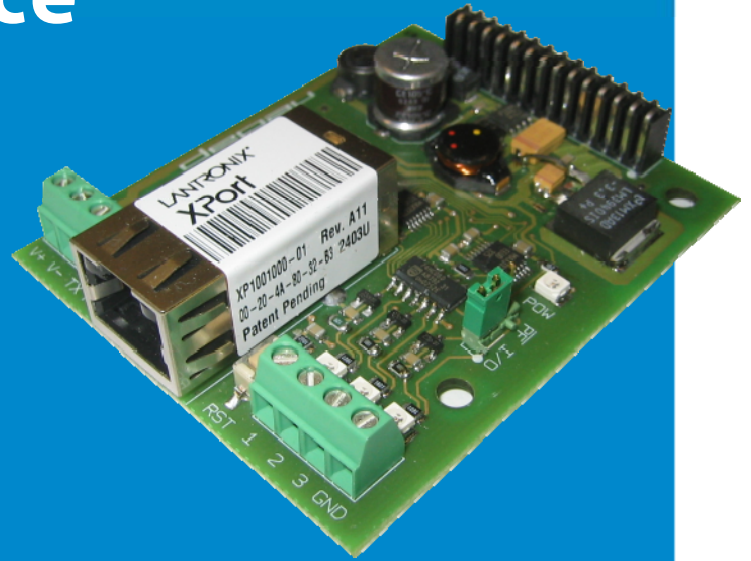

The TCP/IP communication board is designed to connect NEDAP RFID devices with a serial interface to an Ethernet network using the TCP/IP protocol.

Specifications

Dimensions [mm]	40 x 49
Integration in reader types	Prof-IT, Trans-IT
Operating temperature	[°C] 0 ... 70°C
Storage temperature	[°C] 40 ... 85°C
Humidity	10% ... 93% none condensing
Power supply	through readers
Galvanic separation	Max. 600V
Interfaces	RS 485 twisted pair of Fiber optics
Communication protocols	OSI according ISO 7498
Baud rate (kbit/s)	9.6 ... 12000, automatic Baud rate detect
I/O length	210 bytes

Represented by:

NEDAP N.V. Automatic Vehicle Identification - PO Box 103 - NL-7140 AC Groenlo
T: +31 (0) 544 471 666 - F: +31 (0) 544 464 255 - E: info-avi@nedap.com

www.nedapavi.com